



PREMIUM LIVING VICTORIA

How to Measure for a Screen

Aluminum Frames, Wood Frames or Windows with a handle:

- Please call our office to set up and appointment to have your windows measured.

Window with Vinyl Frames

Determine what side the U-channel (deepest channel) is on, this will be the side for the springs
Measure the opening of each direction in multiple locations (i.e. left, center, right) then take the smallest measurement for your calculations.

Measure Frame Thickness:

Standard window screens frames are available in two sizes: 5/16" (Thin), or 7/16" (Regular).

- Measure the left and right track of the frame to determine what frame thickness is needed.
 - If the frame is larger than 7/16", call our office to book a measure appointment.

Measure U-channel Direction:

- This is most commonly the width direction with the U-channel on the left or right.
- Measure from the inner frame opposite the U-channel to the inner frame on the U-channel side (not in the U-channel). **ADD 3/16"** to your measurement

Example #1: $(28 \frac{7}{8}'' + \frac{3}{16}'' = 29 \frac{1}{8}''$)

Example #2: $(32'' + \frac{3}{16}'' = 32 \frac{3}{16}''$)


Measure the Non U-channel Direction:

- This is most commonly the height direction.
- Measure from the inner frame on the top to the inner frame on the bottom
- **Subtract an 1/8"** from your measurement to allow for clearance for installation.

Example #1: $(28 \frac{1}{2}'' - \frac{1}{8}'' = 28 \frac{3}{8}''$)

Example #2: $(32'' - \frac{1}{8}'' = 31 \frac{7}{8}''$)

* If the window screen does not fit with the provided measurements, any cost associated with a re-make or cut-down will be the responsibility of the customer.

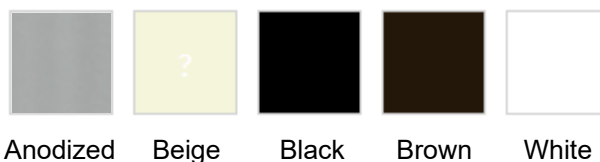

Actual product colour may vary from the colour on your screen. Every monitor or mobile display has a different capability to display colours, and every individual may see these colours differently.